



CONERGY

Conergy PowerPlus 175MC–190MC

Conergy PowerPlus solar modules offer premium quality that pays for itself. They guarantee high system yields and reliable operation over the entire term, and under the most demanding environmental and weather conditions. They are manufactured to the highest quality standards and are characterised by many well thought through details and characteristics that set standards in this combination. We offer a 10-year product warranty for this and comprehensive performance guarantees for a safe and profitable investment.



High yields in practice

- | High-performance modules with monocrystalline, triple busbar cell technology
- | High level of efficiency, even in poor light conditions
- | Up to 2.5% more module output through positive performance tolerance
- | High yield security thanks to comprehensive performance guarantees for 25 years ¹

Premium quality for long service life

- | 10-year product warranty ¹
- | High-quality and quality-tested materials and TÜV-certified production
- | Secure junction box and cavity-free frame
- | High stability, for example in snow, wind and hail, and now with a module load of up to 6,000 Pascal
- | Resistant to all weather conditions and to salt spray and ammonia vapours
- | Free module take-back programme through PV CYCLE ²

Planning flexibility

- | Especially recommended for on-roof systems, even with small areas
- | Optimum area utilisation thanks to compact dimensions
- | Approved for portrait and landscape installation

Easy to install

- | Clamping areas now tested right into the corners for even more flexible installation
- | Easy to transport due to compact format and low module weight, making it one of the lightest modules in its performance class, with a load capacity of 6,000 Pascal
- | Secure installation thanks to reverse polarity protected plugs with twist lock

1 | More output

High level of performance, with up to 190Wp rated capacity and an additional 2.5% positive performance tolerance increase the yield still further, even in small areas.

3 | High-quality materials

Premium quality through the use of high-quality materials. The waterproof, soldered and sealed junction box, for example, is particularly secure, and with its passively cooled 3-bypass diodes, it ensures the highest yields, even in unfavourable ambient conditions.

2 | Very high loading capacity

The high-quality design withstands loads of up to 6,000 Pascal or the impact of golf ball-sized hailstones falling at a speed of 120 km/h with ease.

4 | Conergy premium quality

The entire module development, production, quality assurance and module production is TÜV-certified to ISO 9001 and 14001, and meets or exceeds all relevant standards.




¹ According to Conergy AG's current warranty conditions

² Only for PV-CYCLE member countries, more information at www.pvcycle.com



CONERGY

Conergy PowerPlus 175MC-190MC

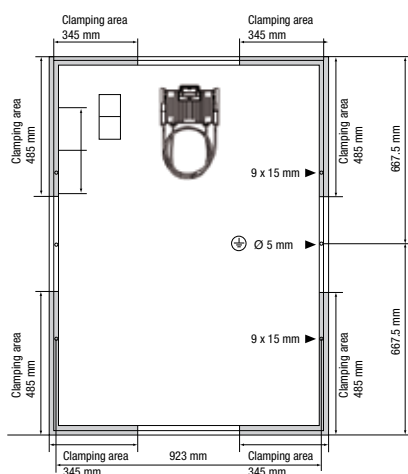

Module dimensions (L × W × H): ¹ 1,335 × 986 × 46 mm
 Cell dimensions: 156 × 156 mm
 No. of cells: 48
 Cell type: Monocrystalline cell incorporating 3-busbar technology
 NOCT: ² 47° C ± 2° C
 Maximum permissible load: 6,000 Pa ³
 Front cover type: Micro-structured solar glass in 3.2 mm diameter
 Cable: 2 × 1,000 mm length, 4 mm² cross-section
 Plug type: Huber + Suhner: plug connector with integrated twist lock
 Frame material: Anodised aluminium
 Module weight: ⁴ 15.5 kg
 Maximum permissible system voltage: 1,000 V
 Reverse current loadability (I_r): 20 A
 Reduction of efficiency from 1,000 W/m² to 200 W/m² in accordance with EN 60904-1: At 200 W/m², 96 % of STC efficiency is achieved
 Certification: IEC/EN 61215 Ed. 2, IEC/EN 61730, SK II, MCS
 Product warranty: ⁵ 10 years
 Performance guarantee 1: ⁵ 12 years/92 %
 Performance guarantee 2: ⁵ 25 years/80 %

Conergy PowerPlus	175MC	180MC	185MC	190MC
Electrical ratings under standard test conditions: ⁶				
Nominal output (P _{nom})	175 W	180 W	185 W	190 W
Performance tolerance	-0/+2.5 %	-0/+2.5 %	-0/+2.5 %	-0/+2.5 %
Module efficiency (P _{nom})	13.29 %	13.67 %	14.05 %	14.43 %
Voltage at maximum performance (U _{mpp}) ⁷	22.85 V	23.18 V	23.42 V	23.83 V
Current at maximum performance (I _{mpp}) ⁷	7.84 A	7.93 A	8.01 A	8.07 A
Off-load voltage (U _{oc}) ⁷	29.05 V	29.07 V	29.16 V	29.34 V
Short-circuit current (I _{sc}) ⁷	8.44 A	8.49 A	8.54 A	8.59 A
Temperature coefficient (P _{mpp})	-0.46 %/° C	-0.46 %/° C	-0.46 %/° C	-0.46 %/° C
Temperature coefficient (U _{oc}), absolute	-0.099 V/° C	-0.099 V/° C	-0.099 V/° C	-0.100 V/° C
Temperature coefficient (U _{oc}), in percent	-0.34 %/° C	-0.34 %/° C	-0.34 %/° C	-0.34 %/° C
Temperature coefficient (I _{sc}), absolute	4.56 mA/° C	4.58 mA/° C	4.61 mA/° C	4.64 mA/° C
Temperature coefficient (I _{sc}), in percent	0.054 %/° C	0.054 %/° C	0.054 %/° C	0.054 %/° C
Electrical rating at 800 W/m², NOCT and AM 1.5				
Power (P _{mpp})	131.87 W	135.31 W	138.09 W	141.56 W
Off-load voltage (U _{oc})	26.61 V	26.63 V	26.71 V	26.87 V
Short-circuit current (I _{sc})	6.99 A	7.04 A	7.08 A	7.12 A
Voltage (U _{mpp})	20.48 V	20.77 V	20.99 V	21.36 V
Current (I _{mpp})	6.49 A	6.56 A	6.63 A	6.68 A

¹ Dimensional tolerance: +/-1 mm
² Nominal operating temperature of the cell at 800 W/m² irradiation, 20° C ambient temperature, wind speed of 1 m/s
³ In accordance with IEC 61215 Ed. 2
⁴ Weight tolerance: +/-0.5 kg
⁵ According to Conergy AG's current warranty conditions
⁶ Standard test conditions defined as follows: 1,000 W/m² radiant power at a spectral density of AM 1.5 and a cell temperature of 25° C
⁷ Typical production values

Available at:

This data sheet complies with the specifications of DIN EN 50380.